



MOSAIC

Montage-instructies

Information

General informations

› **Natura** is an acoustic wall tile for interiors able to improve the aesthetics and comfort of living and working spaces. It is made of a completely natural material based on cotton linters and high quality earth pigments.

The production techniques and treatments to which the › **Natura** products are subjected also give certain resistance to fire and water, integrating the excellent sensory and aesthetic qualities in the finished product.

Unpacking and storage

Cotton products must be handled with care during transport, unpacking and laying. Carefully inspect the materials upon delivery and in the event of damage notify the shipper and notify › Acoustic immediately.

› **Natura** products must be kept in their original packaging up to the time of installation and stored at room temperature in a clean place free from dust and moisture.

Surface conditions

› **Natura** products must be applied on a clean, dry and dust-free surface. The wall and paint must be completely dry.

Cleaning and maintenance

Cotton products must be cleaned with a dry cloth, taking care not to cut or damage the surface. Do not use water, soap or liquid detergents.

The minor damage to cotton products has little › on the overall aesthetics of the product, as it is homogeneous throughout its volume.

In the event of substantial damage, damaged tiles can be replaced individually. It is necessary to carefully remove the compromised elements avoiding to ruin the edges of the surrounding tiles, we recommend in any case to contact › Acoustic for replacement.

Information

Disposal and recycling

The treatments to which **Natura** products are subjected do not degrade the chemical/physical characteristics, therefore at the end of their use they are withdrawn directly from the producer.
If you wish to proceed with disposal, refer to the regulations in force.

Natura is a fully circular material. We are able to fully re-purpose the material into a different format/colour once it has been uninstalled. We are planning on establishing a take-back program, which we will announce once we confirmed some details. This may take some time so stay tuned for more information.

Installation

Natura products can be cut to size if required during the installation phase. Cotton products vary in porosity and density, fundamental characteristics that ensure high acoustic performance, and should therefore be cut with the back side facing up. The back is more porous and may release some product fibers.

Cotton products are mass coloured and for this reason they are uniform in all their volume, therefore they do not require any retouching once processed.

General Notes

These instructions serve as a guide, the installer is required to follow these instructions and perform the work properly. Acoustic assumes no responsibility in the event of improper use of the materials or failure to observe the safety rules. Worry about inspecting the material on delivery and immediately reporting damage and non-compliance to Acoustic. Store the materials in their original packaging in a clean, dry and controlled humidity place.

Method

1 Preperation

Before starting, carefully read the general instructions on page 2 and 3.

Typically, products for ceramic tiles should be thixotropic and exhibit low vertical slip properties to be suitable for laying our tiles (e.g. Bioflex - Kerakoll).

Familiarize yourself with the application instructions for the tile mortar and prepare it accordingly. A notched trowel with 6 x 6 x 6 mm teeth is recommended for working with Cotton Tile Mosaic (e.g. LUX Classic 6 x 6 mm trowel).

All substrates must be level, hardened and undamaged, resistant, dry and free from binding agents and rising damp. Cementitious substrates can be moistened before application or coated with Active Prime Fix or Active Prime Grip .

2 Applying mortar adhesive

For correct installation, it is advisable to apply the paste (e.g. Bioflex - Kerakoll) with a thickness of at least 5 mm on the entire intended wall surface and then comb it with the appropriate notched trowel.


Clean the tools and any product residue from the surfaces with water while the mortar adhesive is still wet

After curing, it can only be removed mechanically.

NOTE:


Verification that the adhesive is suitable for your application. unsuitable adhesives.

Acoustic is not liable for the use of

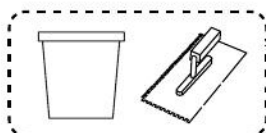

Front

Side

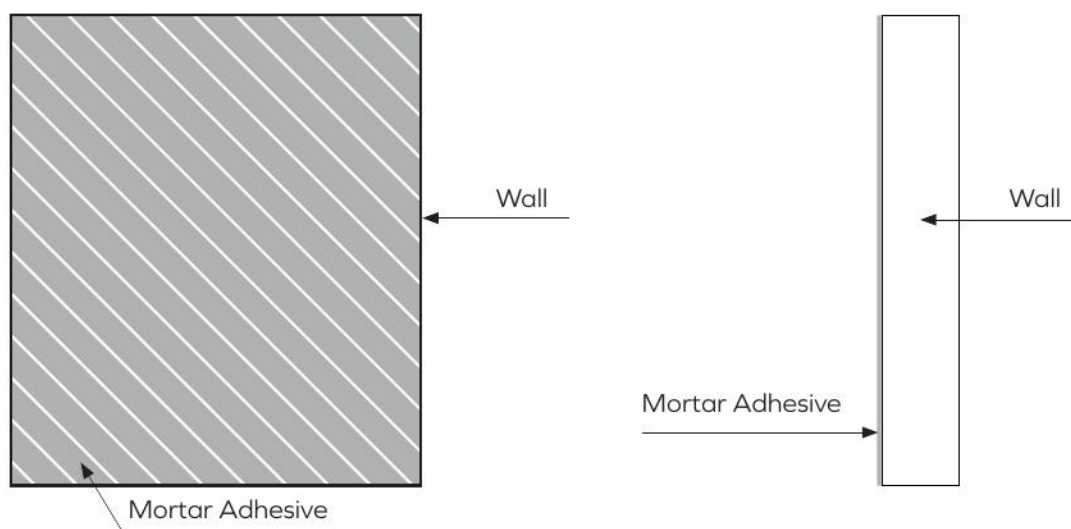


Method


3 Placing the first tile

Fit the first tile in the bottom corner.

Front

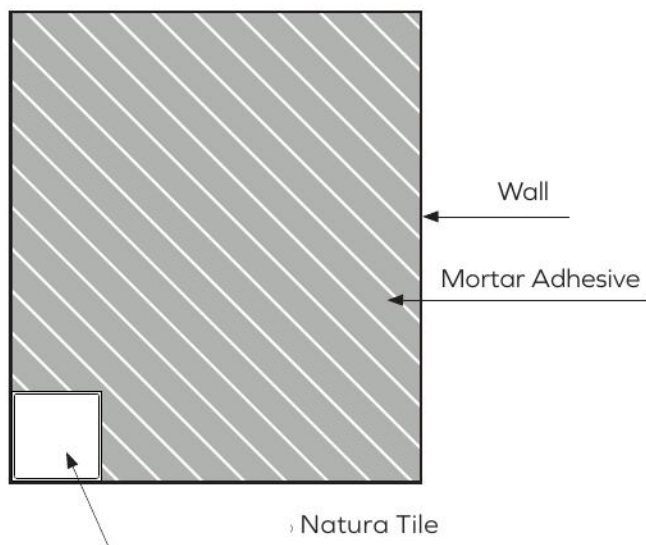


Side

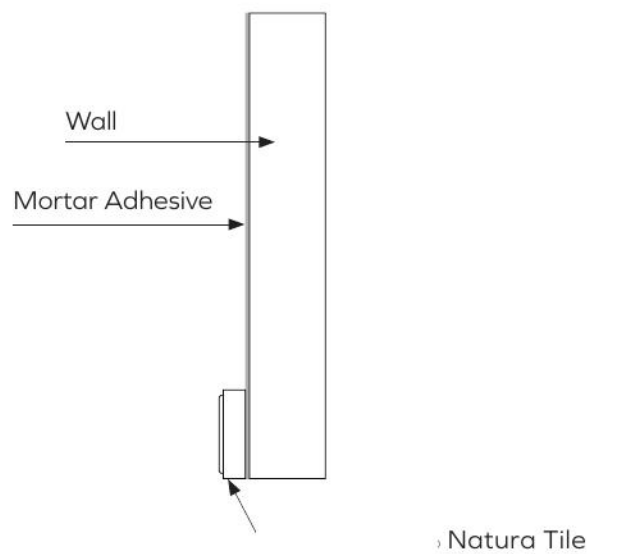


3.1 Install the remaining tiles

Place the remaining tiles on the wall, taking care to insert them in sequence from bottom to top.

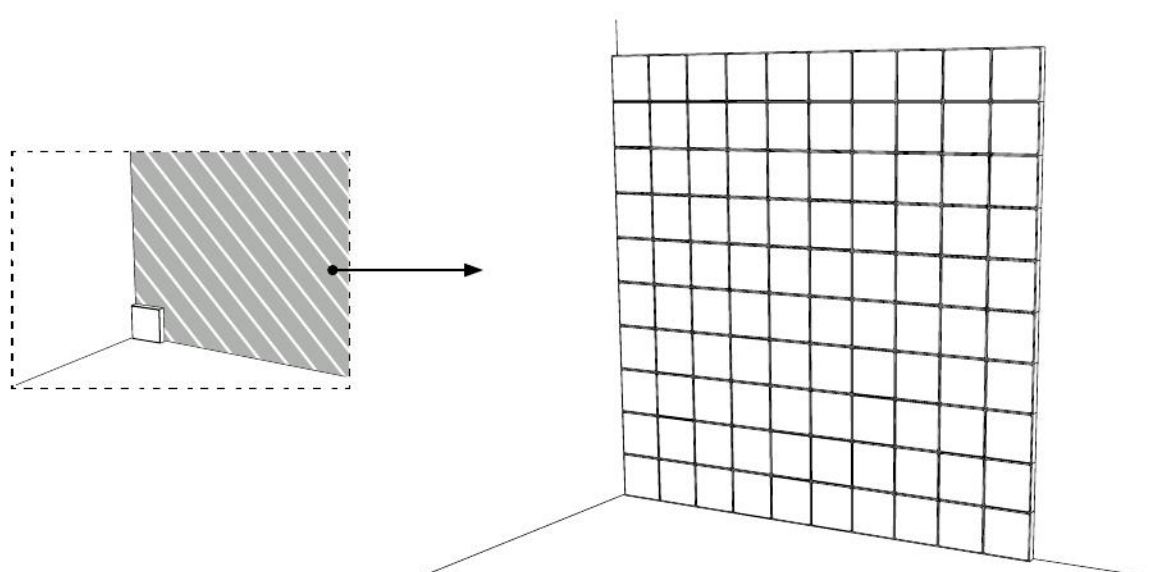

Recommended Machining Methods

Cut the **Natura** in 45° for the corner.


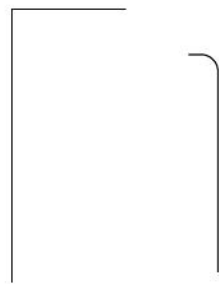


Cut the **Natura** in until the edge of the wall.



Natura products can be cut to size if required during the installation phase. Standard woodworking machines like circular saws, jigsaws or band saws can be used. Holes can be made with a hole saw. **Natura** products vary in porosity and density, fundamental characteristics that ensure high acoustic performance, and should therefore be cut with the back side facing up. The back is more porous and may release some product fibers.

Cotton products are mass coloured and for this reason they are uniform in all their volume, therefore they do not require any retouching once processed.

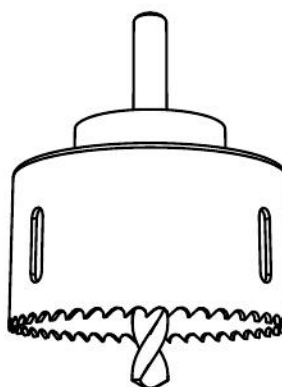

**#We
MakeAn
Impact**